




# Asus Padfone 2 Camera Replacement

Written By: Erica



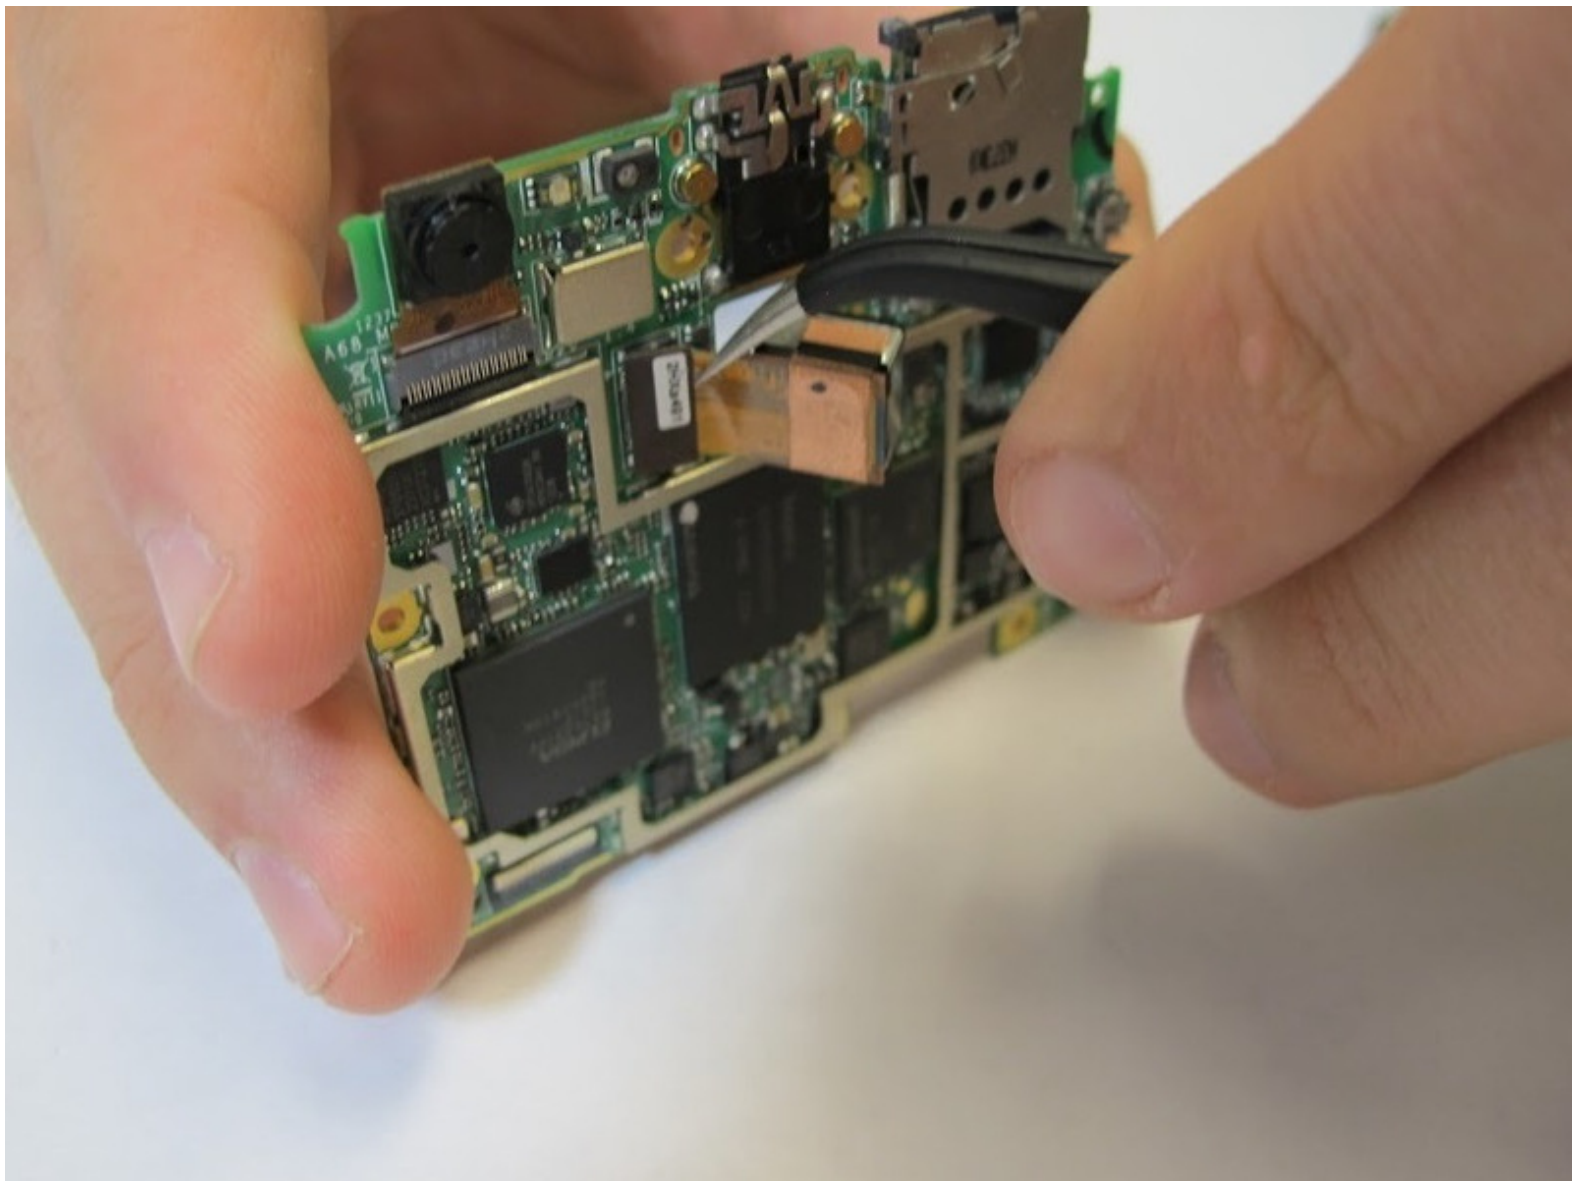


## TOOLS:


- [Tweezers](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Power Down Device




 Hold down the power button.

## Step 2 — Remove Back Plate

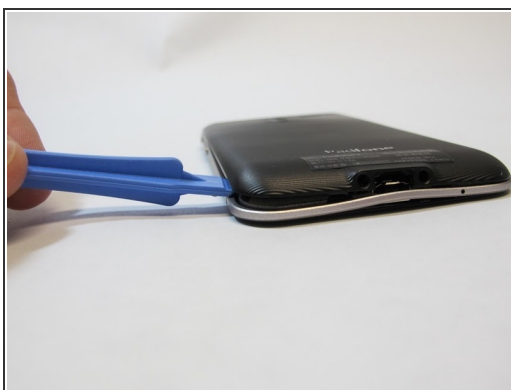

- Use plastic opening tool to pry off the back cover of the phone.

## Step 3 — Battery Removal

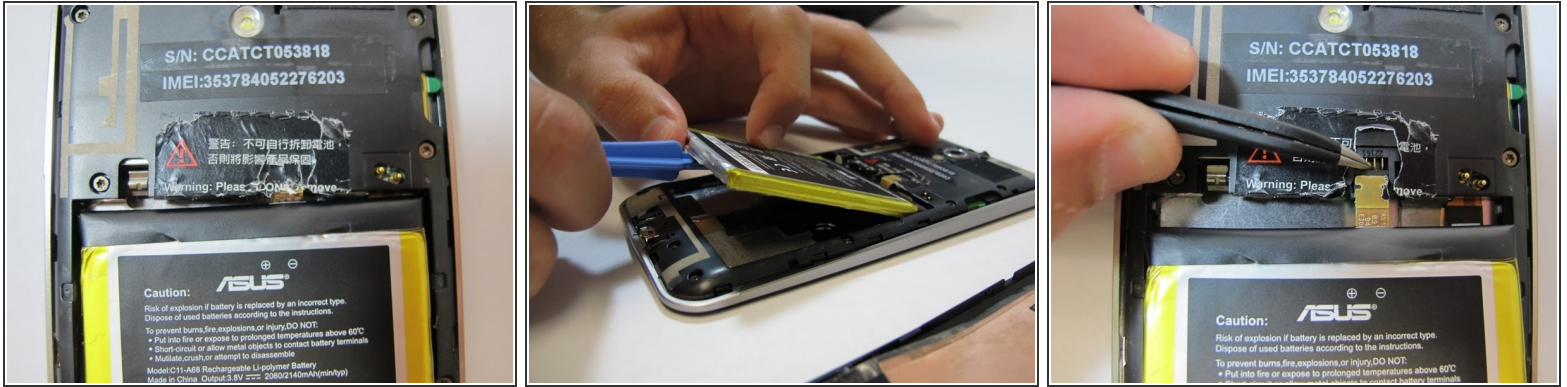

- Remove the warning sticker that covers the battery plug and connecting cord.
  - Look for the widest gap on either side of the battery. Using the plastic opening tool carefully lift battery out.
- ⚠ The battery is held down with adhesive. Be careful not to damage battery or connecting cord.
- Disconnect battery connecting cord using tweezers.




## Step 4 — Remove Internal Back Plate



- Use T5 Torx screwdriver to remove 14 screws from internal back plate.
- i** Use of magnetic pad will help with keeping track of screws.
- Once screws are out, remove the plate.





## Step 5 — Disconnect Motherboard

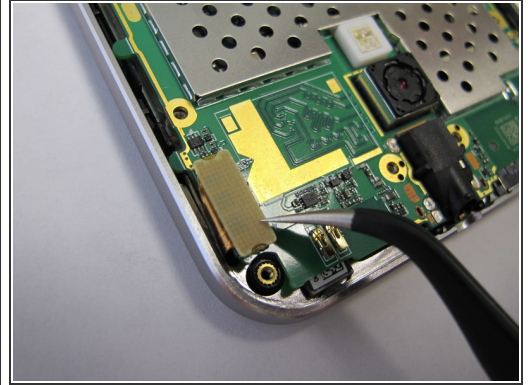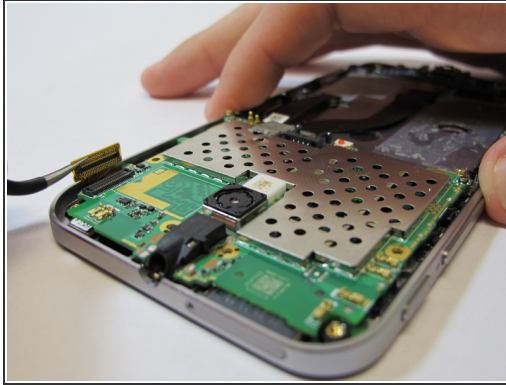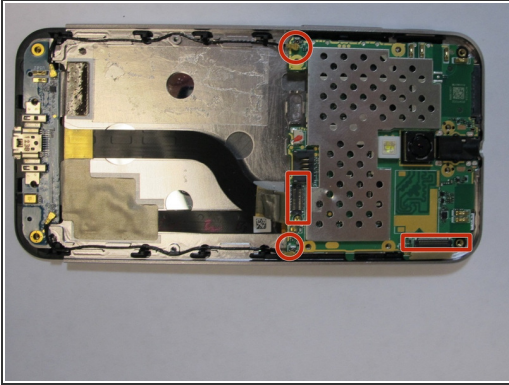

- Disconnect four plugs to the motherboard using tweezers.
- Lift up green motherboard.

## Step 6 — Removing Camera

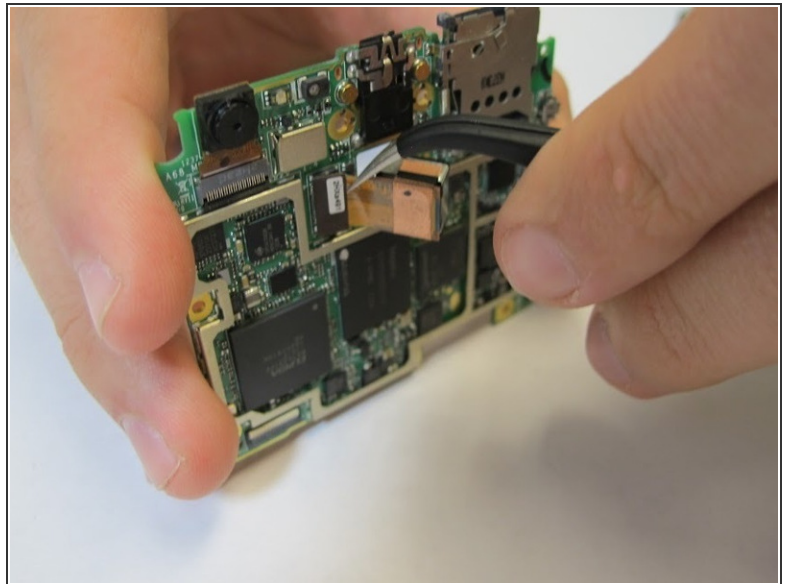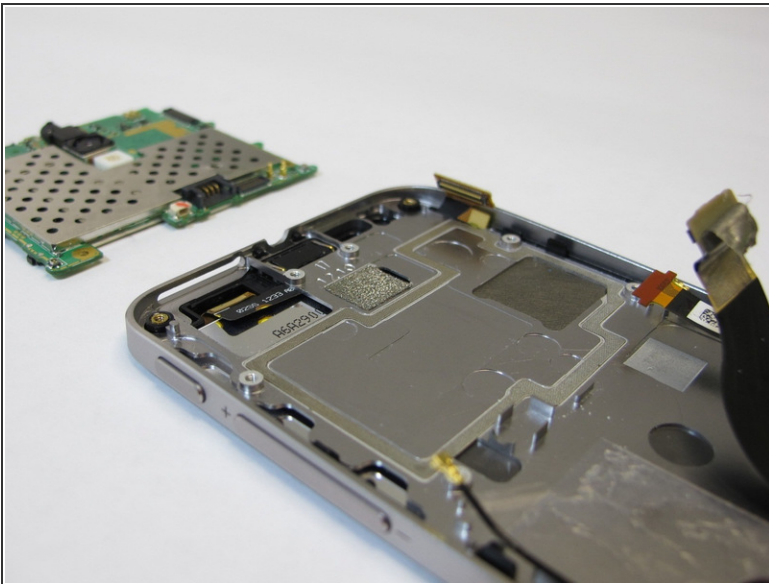

- Remove camera from back of the motherboard with tweezers.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 05:32:44 AM.